




Specification Sheet

Jack Alan Haas Phone: (805) 647-1200
 1585 Los Angeles Ave. Fax: (805) 647-1211
 Saticoy, CA 93004 Cell: (805) 889-0747
 jack@customcurbinc.com

- Heavy Duty Ball Bearings on Sizes 16 thru 48.
- Self-Lubricating Nylon Bearings on Sizes 6 thru 14.
- Double Cap Assures Extra Strength.
- Locked On Rotor Mechanism Prevents Loss or Damage in High Winds.
- Corrugated Vanes Provide More Strength and Stability.
- Lower Bearings Are Oil Impregnated Sintered-Type Wich Assures Quiet Operation.
- Sealed Bearing Housing Excludes Dust, Grit, and Foreign Matter and Retains Lubrication.
- Mill Finish Zinc-Aluminum Construction On Sizes 6-24. Grey Polyurethane Coating Over G90, Galvanized Material On Sizes 30-48

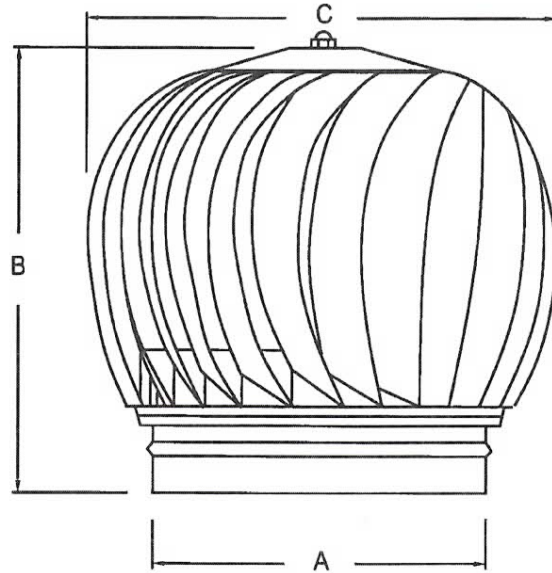

MODEL	DIMENSION - GAUGES			GAUGES	
	A	B	C	Galv.	SS
RR-6	6	11-3/4	10	26	26
RR-8	8	13	12-1/2	26	26
RR-10	10	14-1/2	14-1/2	26	26
RR-12	12	15-1/2	16-3/8	24	24
RR-14	14	17-1/2	18-5/8	24	24
RR-16	16	20-1/4	21-3/4	24	24
RR-18	18	22-1/2	23-3/4	24	24
RR-20	20	24-5/8	26-3/8	24	24
RR-24	24	29	32	24	24
RR-30	30	39	39	22	22
RR-36	36	37	46	22	22
RR-42	42	46	52	20	20
RR-48	48	50	60	20	20

Options & Accessories

- B -Model B base
- C -Model C flat collar base
- DD -Unit disc damper
- BS - Birdscreen
- ISC -Insect screen
- ADE -Air dry enamel

QTY	MODEL	EXHAUST CFM	WIND SPEED	STACK HEIGHT	TEMP. DIFF.	MATERIAL		ACCESSORIES	MARK
						ZINC ALUM	SS		

PROJECT: LOCATION: SUBMITTED BY: DATE:	CONTRACTOR: ENGINEER: APPROVED BY: DATE:
---	---